



wheel jets

professional technology without compromises
100 - 1000 bar




www.falch.com



application examples



wheel jets – only for hard jobs

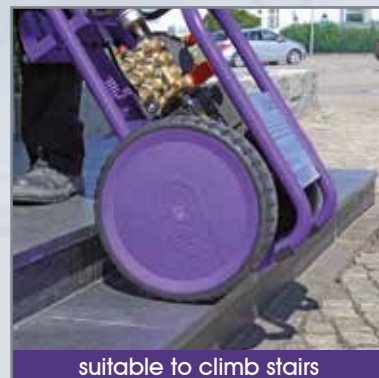

wheel jet 2
100-10-0-e
2 kW, 100 bar, 10 l/min, 230 V

wheel jet 5
200-13-0-e
5 kW, 200 bar, 13 l/min, 400 V

wheel jet 5
200-13-0-p
5 kW, 200 bar, 13 l/min, petrol
hand start

wheel jet 11
300-18-0-e
11 kW, 300 bar, 18 l/min, 400 V



wheel jet 11
300-18-0-p
11 kW, 300 bar, 18 l/min, petrol,
e-start

wheel jet 15
500-15-0-e
15 kW, 500 bar, 15 l/min, 400 V

wheel jet 18
500-18-0-p
18 kW, 500 bar, 18 l/min, petrol,
e-start

wheel jet 30
500-30-0-e
30 kW, 500 bar, 30 l/min, 400 V

wheel jet 30
1000-16-0-e
30 kW, 1000 bar, 16 l/min, 400 V

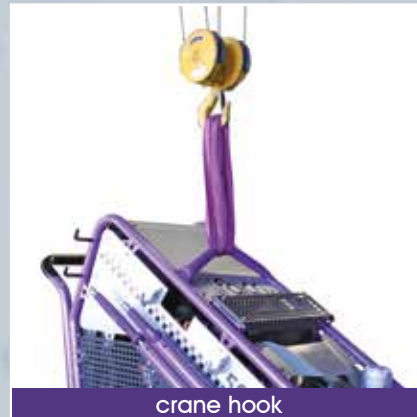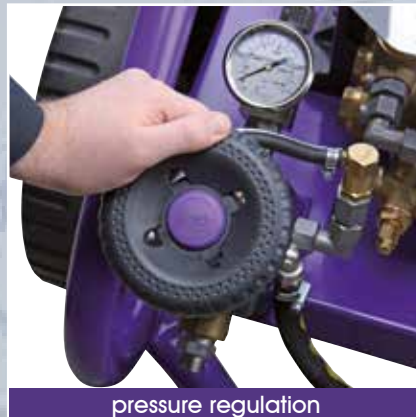

wheel jet 2/5/11

	wheel jet 2 e	wheel jet 5 e	wheel jet 5 p	wheel jet 11 e	wheel jet 11 p
	30 - 100 bar	30 - 200 bar	30 - 200 bar	30 - 300 bar	30 - 300 bar
	5 - 10 l/min	5 - 13 l/min	5 - 13 l/min	8 - 18 l/min	8 - 18 l/min
	2,0 kW / 1,8 kW, 2800 rpm, air	6,0 kW / 5,0 kW, 2800 rpm, air	-	13 kW / 11 kW, 1460 rpm, air	-
	230 V/50 Hz/16 A, 5,0 m	400 V/50 Hz/16 A, 5,0 m	-	400 V/50 Hz/32 A, 4,0 m	-
	-	-	7,2 kW / 7,1 kW, 3250 rpm, 3430 rpm, 1 cyl., 305 ccm, air	-	13 kW / 12 kW, 3150 rpm, 3400 rpm, 2 cyl., 570 ccm, air
	-	-	1,0 l/h petrol	-	2,8 l/h petrol
	1,8 kW, 2800 rpm, 2,0 - 8,0 bar, 60° C	5,0 kW, 2800 rpm, 2,0 - 8,0 bar, 60° C	5,0 kW, 3250 rpm, 2,0 - 8,0 bar, 60° C	11 kW, 1460 rpm, 2,0 - 8,0 bar, 70° C	11 kW, 1460 rpm, 2,0 - 8,0 bar, 70° C
	045 USgal/min	040 USgal/min	040 USgal/min	045 USgal/min	045 USgal/min
	-	■	-	-	-
	-	-	-	■	■
	24/1 h/d	24/1 h/d	24/1 h/d	24/1 h/d	24/1 h/d
	24 months	24 months	24 months	24 months	24 months
	-	-	3,6 l	-	7,9 l
	45 kg	55 kg	105 kg	230 kg	191 kg
	1000 x 570 x 430 mm	1000 x 570 x 430 mm	1100 x 750 x 815 mm	1175 x 760 x 945 mm	1160 x 755 x 950 mm
	LpA = 73 dB LwA = 86 dB	LpA = 74 dB LwA = 92 dB	LpA = 84 dB LwA = 98 dB	LpA = 77 dB LwA = 94 dB	LpA = 86 dB LwA = 102 dB
	g349	g334	g333	g332	g331

perfect jobs by perfect accessories



wheel jet 15/18/30

	wheel jet 15 e	wheel jet 18 p	wheel jet 30 e	
	50 - 500 bar	50 - 500 bar	50 - 500 bar	50 - 1000 bar
	8 - 15 l/min	8 - 18 l/min	10 - 30 l/min	7 - 16 l/min
	18 kW / 15 kW, 1450 rpm, air	-	36 kW / 30 kW, 1480 rpm, air	36 kW / 30 kW, 1480 rpm, air
	400 V/50 Hz/32 A, 4,0 m	-	400 V/50 Hz/63 A, 5,0 m	400 V/50 Hz/63 A, 5,0 m
	-	23 kW / 17,9 kW, 2750 rpm, 2100 rpm, 2 cyl., 895 ccm, air	-	-
	-	4,5 l/h petrol	-	-
	15 kW, 1088 rpm, 2,0 - 8,0 bar, 40° C	18 kW, 1085 rpm, 2,0 - 8,0 bar, 40° C	30 kW, 1061 rpm, 2,0 - 8,0 bar, 40° C	30 kW, 1061 rpm, 2,0 - 8,0 bar, 40° C
	030 USgal/min	035 USgal/min	060 USgal/min	021 USgal/min
	■	-	-	-
	■	■	■	■
	24/1 h/d	24/1 h/d	24/1 h/d	24/1 h/d
	24 months	24 months	24 months	24 months
	-	70 l	-	-
	290 kg	225 kg	510 kg	515 kg
	1175 x 760 x 945 mm	1450 x 790 x 1155 mm	1275 x 900 x 1070 mm	1275 x 900 x 1070 mm
	LpA = 78 dB LwA = 95 dB	LpA = 85 dB LwA = 103 dB	LpA = 78 dB LwA = 96 dB	LpA = 78 dB LwA = 96 dB
	g393	g365	g411	g412

services



Falch gmbh
headquarter
street of water jetting 1
89143 blaubeuren-seissen (germany)

☎ +49 7344 9244-0
☎ +49 7344 9244-4090

✉ info@falch.com
🌐 www.falch.com